


Features:



- Open or Encapsulated PCB mounting
- Designed for Wide band and General Pulse applications.
- Ideal for Triac and Thyristor Control Systems
- Max Pulse Current 200mA (Peak)
- UL94-V0 rated materials.
- RoHS Compliant

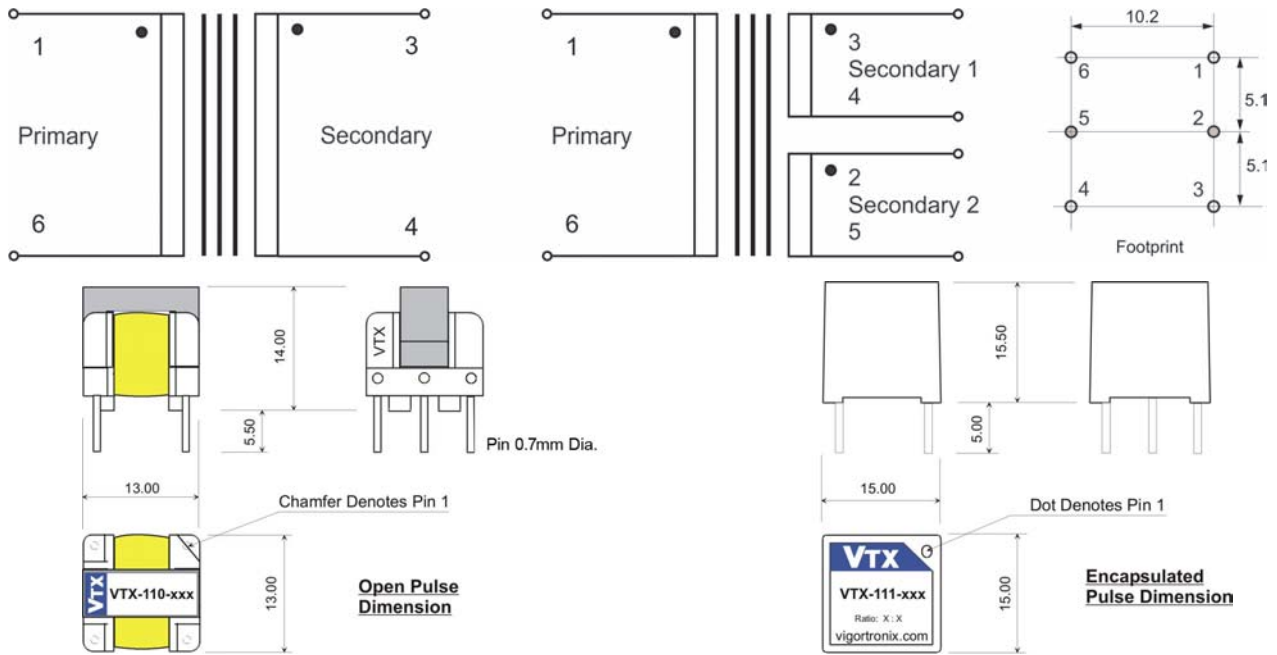

Part No	Ratio	Ind. Pri (mH) Min	Ind. Sec (mH) Min	Pri DCR Ω +/-10%	Sec DCR Ω +/-10%	Int-Wind Cap	Leakage Ind.	Isolation Voltage	Bandwidth	Volt-Time Prod.	Max Pulse Current
VTX-110-004	1:1	3	3	1.10	1.32	20pF	19uH	2.8KVac	3kHz ~ 1MHz	200V uS	200mA
VTX-111-004	1:1	3	3	1.10	1.32						
VTX-110-006	1:1+1	3	3 + 3	1.32	1.1+1.54	30pF	8uH				
VTX-111-006	1:1+1	3	3 + 3	1.32	1.1+1.54						
VTX-110-008	2:1+1	12	3 + 3	3.36	1.4 + 2.0	26pF	30uH				
VTX-111-008	2:1+1	12	3 + 3	3.36	1.4 + 2.0						
VTX-110-010	2:1	12	3	2.32	1.45	19pF	115uH				
VTX-111-010	2:1	12	3	2.32	1.45						
VTX-110-014	1:4	3	50	1.85	5.6	22.5pF	370uF				
VTX-111-014	1:4	3	50	1.85	5.6						
VTX-110-041	4:1	50	3	5.6	1.85	22.5pF	370uF				
VTX-111-041	4:1	50	3	5.6	1.85						
VTX-110-047	2:1	12	3	2.3	1.1	5.0pF	73uH	3.2KVac			
VTX-111-042	1:1	3	3	0.8	0.8	5.0pF	85uH	5KVac			
VTX-111-045	2:1	1.5	0.4	0.44	0.2	5.0pF	85uH				
VTX-111-047	2:1	12	3	2.3	1.1	5.0pF	73uH				

Please contact Vigortronix for any enquires. Products can be altered to suit custom requirements.
The information contained in this document is subject to change without notice.